



Specifications:

- Product life min. 50.000h L80 B10 at Ta.max
or 70.000h L70 B10 at Ta.max -10°C.
- Available in 3000K, 4000K, 5000K with CRI of min.80
- MacAdam 3 SDCM
- Luminous efficiency: LER frosted diff. up to 150 lm/W.
- 220-240V 0/50/60 Hz. (also DC for CBS)
- Ta: -20°C/Ta.max.
- **Optional :** - 1-10V and Dali
 - CRI min. 90.
 - Brackets inox AISI 316.
 - Trough-wiring 1/3 phase.
 - Emergency 3H unit.

LED INTEGRATED luminaire with high protection: IP67.
Standard with stainless steel suspension Brackets.
Body made of Polycarbonate. White metal Gear Tray.
Special frosted polycarbonate Diffuser, >6NM. Adels,
MPM, Wieland or Stucchi Connectors.

Base: Frosted PC Body / Inox AISI 304 Endcaps

Always with stainless steel suspension Brackets
Adels, MPM, Wieland or Stucchi Connectors

Diffuser: special frosted polycarbonate for a smooth
uniform lighting

Gear tray: white painted steel.


PHILIPS Inside: Fortimo LED Strip 1R or 3R
Xitanium Driver



Model	Length	Power*	LED	Flux**	Ta.max.
600	605 mm	9 W	1 R	1170 lm	51°C
		14 W	1 R	2030 lm	45°C
1200	1205 mm	16 W	1 R	2160 lm	51°C
		27 W	1 R	4050 lm	45°C
		40 W	1 R	5200 lm	40°C
1500	1505 mm	20 W	1 R	2700 lm	51°C
		34 W	1 R	4930 lm	45°C
		55 W	1 R	7150 lm	40°C

* Total power consumption of LED's and driver.

** Luminous flux of fitting @ 25°C for 840 and 850
(correction factor 0.95 for 830)

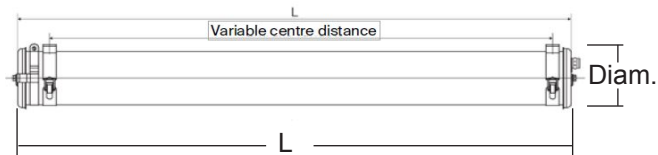

Housing	L	Diam.	Kg
600	605	85	1,8
1200	1205	85	2,4
1500	1505	85	2,7

