





Linear luminaire made of extruded aluminum profile. High luminous efficacy optics. Selection of diffusers and low glare lenses. Direct lighting type. Top quality SMD LED modules with colour consistency MacAdams ≤ 3 , extensive portfolio of lumen ranges, CCTs and spectra. Variety of drivers: standard EVG on/off, DALI and wireless controlled as MasterConnect or Casambi on request. Mounting type: recessed into Interlu SAPP ceiling (custom made ceiling brackets for other ceiling types on request). Standard colour RAL 9005M, any other colour from basic RAL range available at no extra cost. Variety of beam angles, diffusers, lumen outputs and drivers allows to use this luminaire in different types of lighting projects. Wide selection of standard lengths. End caps included. Bespoke lengths and shapes of lighting lines available on request. Luminous flux & Luminaire Power tolerance up to 10%. System power consumption depends on components used. Luminous efficacy depends on type of LED's, electronics, optics and diffuser. The most up to date technical parameters can be found on our website and in database of LDT files.

Lighting direction:

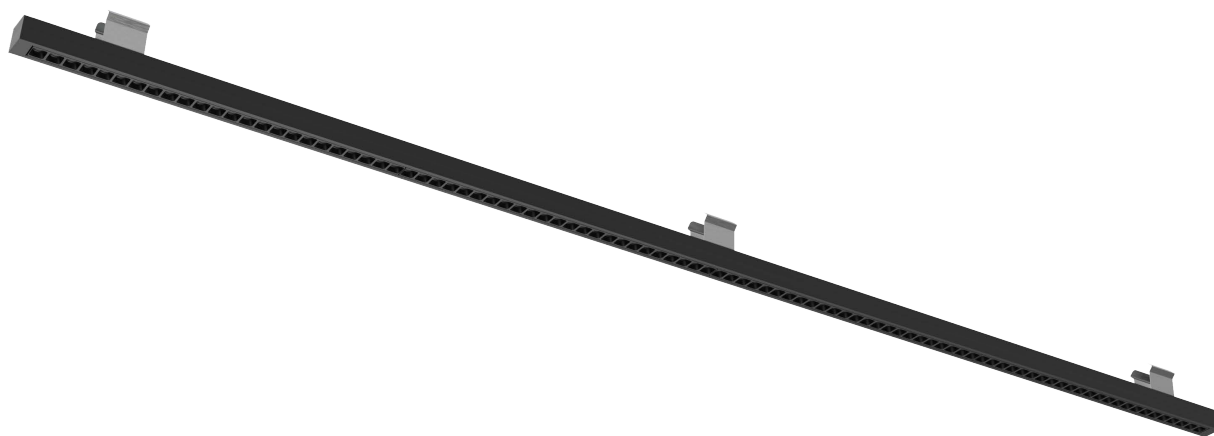

Mounting:	Recessed into Interlu SAPP beam ceiling type
Body material:	Aluminium profile
Colour:	Standard white RAL 9005M, other RAL colours on request
Lumen output:	Standard up to 4000 lm/meter, any other on request
LED module:	Signify (Philips), Tridonic or equivalent SMD LED modules
Colour temperature:	3000/4000K other on request
Colour Rendering:	CRI>80 in standard, other on request
Driver:	EVG on-off/DALI/MC (MasterConnect)/Casambi, other on request
Wireless controll:	MasterConnect / Casambi, other on request
Daylight/Occupancy sensor:	wireless iCS sensor
Emergency unit:	N/A
Operating temperature range:	0°C ... +35°C
IP Class:	IP20 in standard
Power:	220-240V 50/60Hz
Lighting direction:	Direct lighting
Light distribution:	Symmetric
Optics:	UGR<19 diffused lenses PREMIUM1 type
Beam angle:	30°/40°/60° - all types available in our LDT file database
Warranty:	5 Years standard warranty

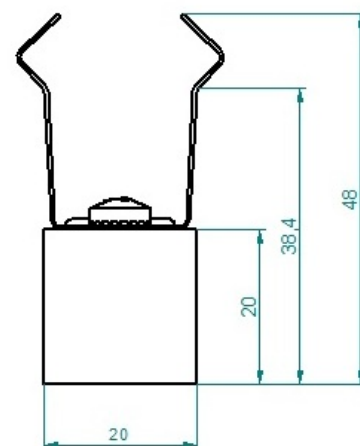

Product code	Product name	Gross Lumen [lm]	Nett Lumen [lm]	Power [W]	Efficacy [lm/W]	Colour temperature [K]	Optics	Length [mm]	Width [mm]	Height [mm]
PROFILE type S DN (single bar) light down,end caps included, special mounting brackets for SAPP (Interlu) ceiling included										
10.03000.83.E.30.LNS	PROLINE 20 PREMIUM S DN 2200lm / 830 / E / 30 / LNS	2200	1760	13,1	134	3000	30°	580	20	20
10.03000.83.E.40.LNS	PROLINE 20 PREMIUM S DN 2200lm / 830 / E / 40 / LNS	2200	1760	13,1	134	3000	40°	580	20	20
10.03000.83.E.60.LNS	PROLINE 20 PREMIUM S DN 2200lm / 830 / E / 60 / LNS	2200	1760	13,1	134	3000	60°	580	20	20
10.03000.84.E.30.LNS	PROLINE 20 PREMIUM S DN 2200lm / 840 / E / 30 / LNS	2200	1760	13,1	134	4000	30°	580	20	20
10.03000.84.E.40.LNS	PROLINE 20 PREMIUM S DN 2200lm / 840 / E / 40 / LNS	2200	1760	13,1	134	4000	40°	580	20	20
10.03000.84.E.60.LNS	PROLINE 20 PREMIUM S DN 2200lm / 840 / E / 60 / LNS	2200	1760	13,1	134	4000	60°	580	20	20
10.03001.83.E.30.LNS	PROLINE 20 PREMIUM S DN 3300lm / 830 / E / 30 / LNS	3300	2640	19,7	134	3000	30°	860	20	20
10.03001.83.E.40.LNS	PROLINE 20 PREMIUM S DN 3300lm / 830 / E / 40 / LNS	3300	2640	19,7	134	3000	40°	860	20	20
10.03001.83.E.60.LNS	PROLINE 20 PREMIUM S DN 3300lm / 830 / E / 60 / LNS	3300	2640	19,7	134	3000	60°	860	20	20
10.03001.84.E.30.LNS	PROLINE 20 PREMIUM S DN 3300lm / 840 / E / 30 / LNS	3300	2640	19,7	134	4000	30°	860	20	20
10.03001.84.E.40.LNS	PROLINE 20 PREMIUM S DN 3300lm / 840 / E / 40 / LNS	3300	2640	19,7	134	4000	40°	860	20	20
10.03001.84.E.60.LNS	PROLINE 20 PREMIUM S DN 3300lm / 840 / E / 60 / LNS	3300	2640	19,7	134	4000	60°	860	20	20
10.03002.83.E.30.LNS	PROLINE 20 PREMIUM S DN 4400lm / 830 / E / 30 / LNS	4400	3520	26,3	134	3000	30°	1140	20	20
10.03002.83.E.40.LNS	PROLINE 20 PREMIUM S DN 4400lm / 830 / E / 40 / LNS	4400	3520	26,3	134	3000	40°	1140	20	20
10.03002.83.E.60.LNS	PROLINE 20 PREMIUM S DN 4400lm / 830 / E / 60 / LNS	4400	3520	26,3	134	3000	60°	1140	20	20
10.03002.84.E.30.LNS	PROLINE 20 PREMIUM S DN 4400lm / 840 / E / 30 / LNS	4400	3520	26,3	134	4000	30°	1140	20	20
10.03002.84.E.40.LNS	PROLINE 20 PREMIUM S DN 4400lm / 840 / E / 40 / LNS	4400	3520	26,3	134	4000	40°	1140	20	20
10.03002.84.E.60.LNS	PROLINE 20 PREMIUM S DN 4400lm / 840 / E / 60 / LNS	4400	3520	26,3	134	4000	60°	1140	20	20
10.03003.83.E.30.LNS	PROLINE 20 PREMIUM S DN 5500lm / 830 / E / 30 / LNS	5500	4400	32,8	134	3000	30°	1420	20	20
10.03003.83.E.40.LNS	PROLINE 20 PREMIUM S DN 5500lm / 830 / E / 40 / LNS	5500	4400	32,8	134	3000	40°	1420	20	20
10.03003.83.E.60.LNS	PROLINE 20 PREMIUM S DN 5500lm / 830 / E / 60 / LNS	5500	4400	32,8	134	3000	60°	1420	20	20
10.03003.84.E.30.LNS	PROLINE 20 PREMIUM S DN 5500lm / 840 / E / 30 / LNS	5500	4400	32,8	134	4000	30°	1420	20	20
10.03003.84.E.40.LNS	PROLINE 20 PREMIUM S DN 5500lm / 840 / E / 40 / LNS	5500	4400	32,8	134	4000	40°	1420	20	20
10.03003.84.E.60.LNS	PROLINE 20 PREMIUM S DN 5500lm / 840 / E / 60 / LNS	5500	4400	32,8	134	4000	60°	1420	20	20